



C6P (ez360 Pano)

360° Fisheye Security.
Zero Blind Spots.

A panoramic Wi-Fi camera offering complete coverage without any blind spots.

Key Features




Premium metal body. Excellent design and production quality for extreme durability.

**TRIPLE
HD**

Triple HD resolution 3 megapixels and fisheye up to 1344*1344



360° omnidirectional monitoring. One camera, complete coverage.



Quad Split-Screen



2.4GHz/5GHz dual band Wi-Fi. Smart configuration via QR code.



True Day/Night camera with auto-switching. Infrared night vision up to 7.5 meters.



Two-way audio. Pickup distance up to 5 meters.



Supports MicroSD card up to 128GB.




360° panoramic view

With a 360° panoramic view, the C6P (ez360 Pano) provides complete perspective, leaving no corners unwatched.




Multiple viewing modes


Enjoy four different screen viewing modes to meet your specific needs.

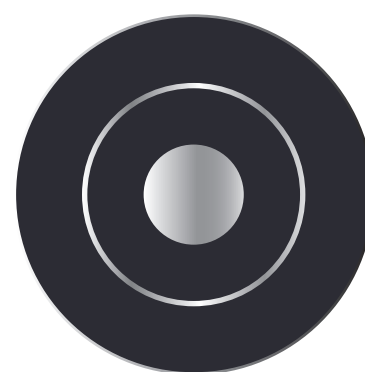


Panoramic View

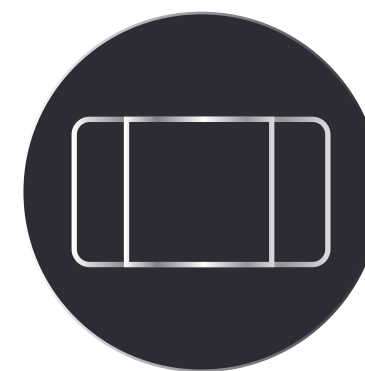

Expanded View

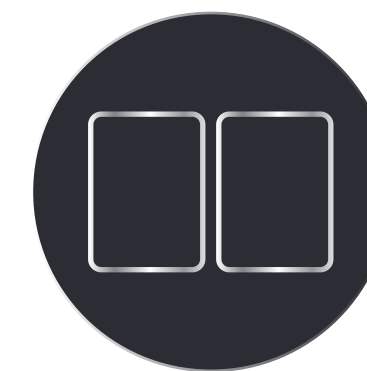

Dual-Screen

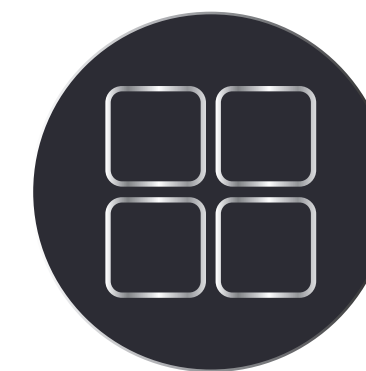

Quad-Screen


Super HD camera

The 3MP sensor delivers crystal clear imagery.




Dual-band Wi-Fi

Supports 2.4 GHz and 5.0 GHz Wi-Fi connectivity, ensuring stable and smooth wireless transmission.

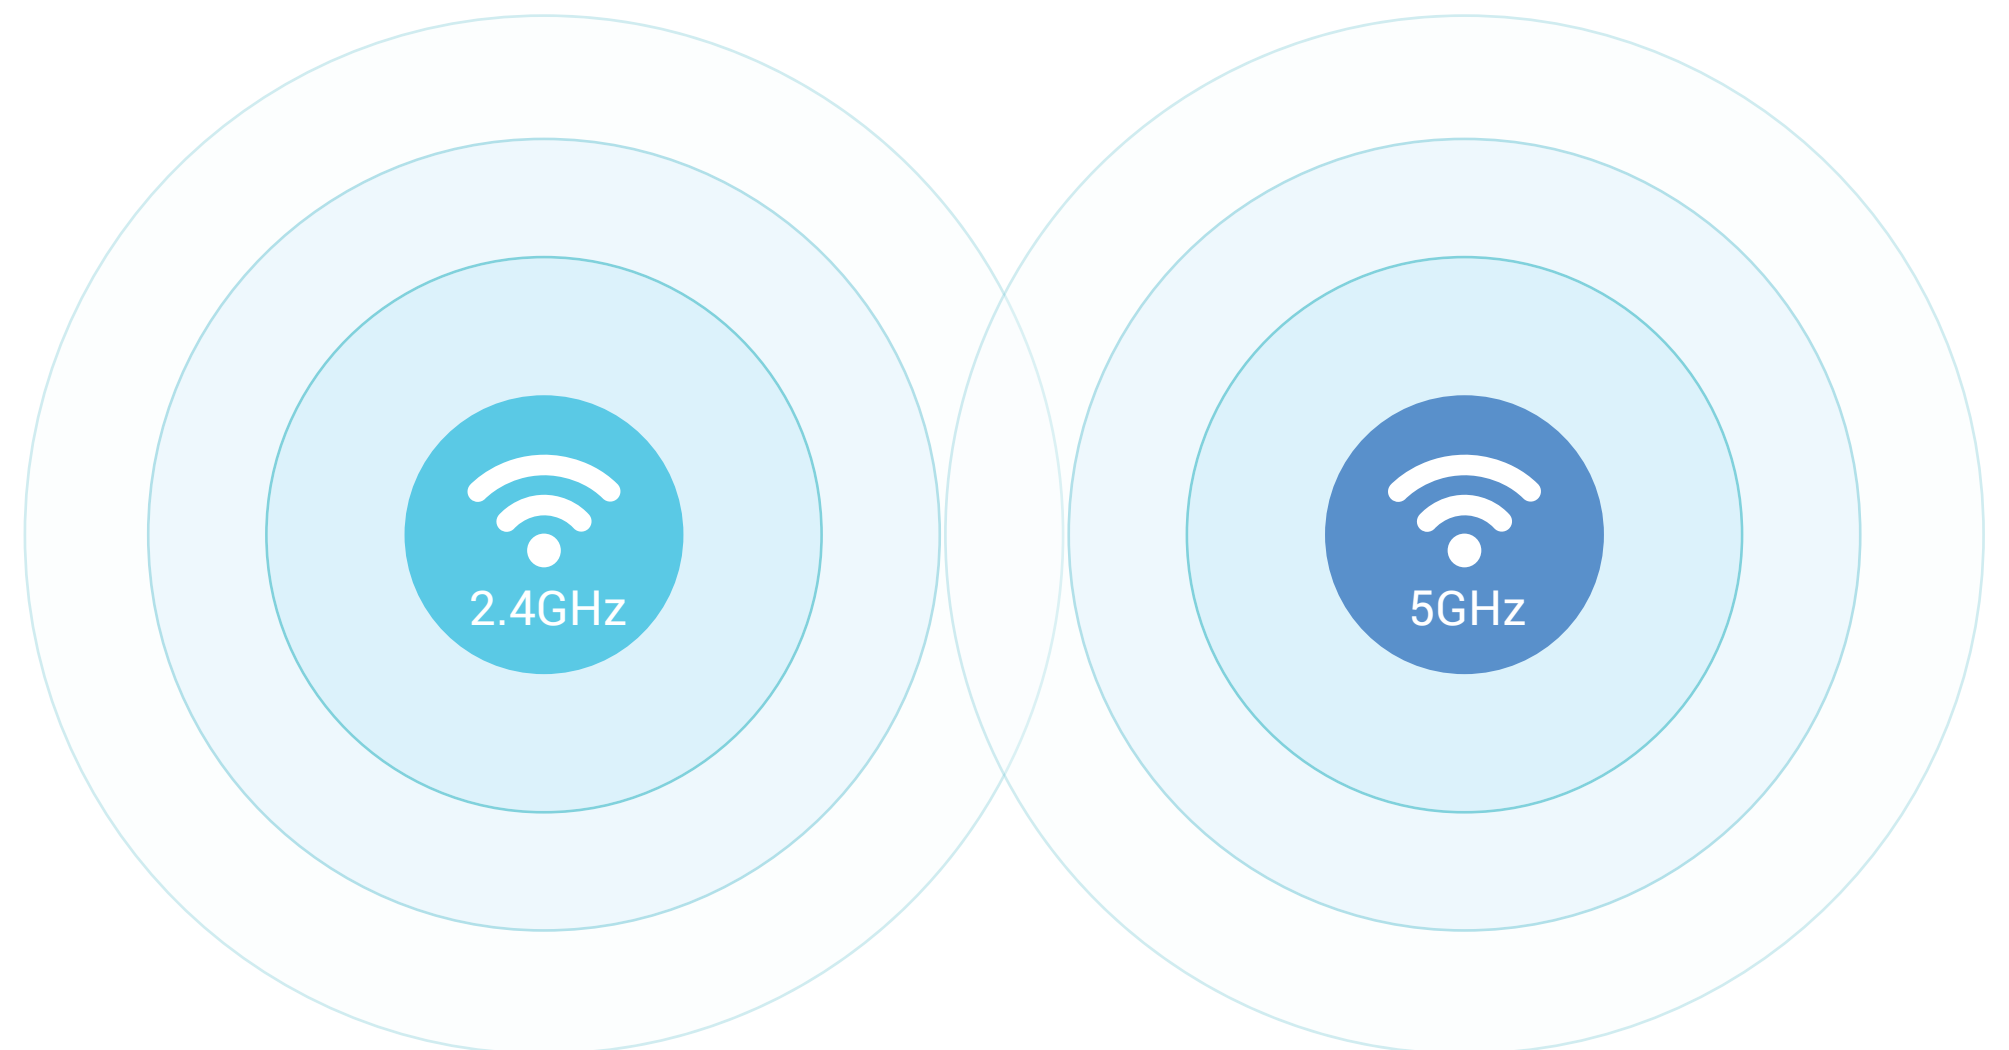


Two-way audio

The built-in microphone and speaker deliver crystal-clear, smooth voice transmission in real time.

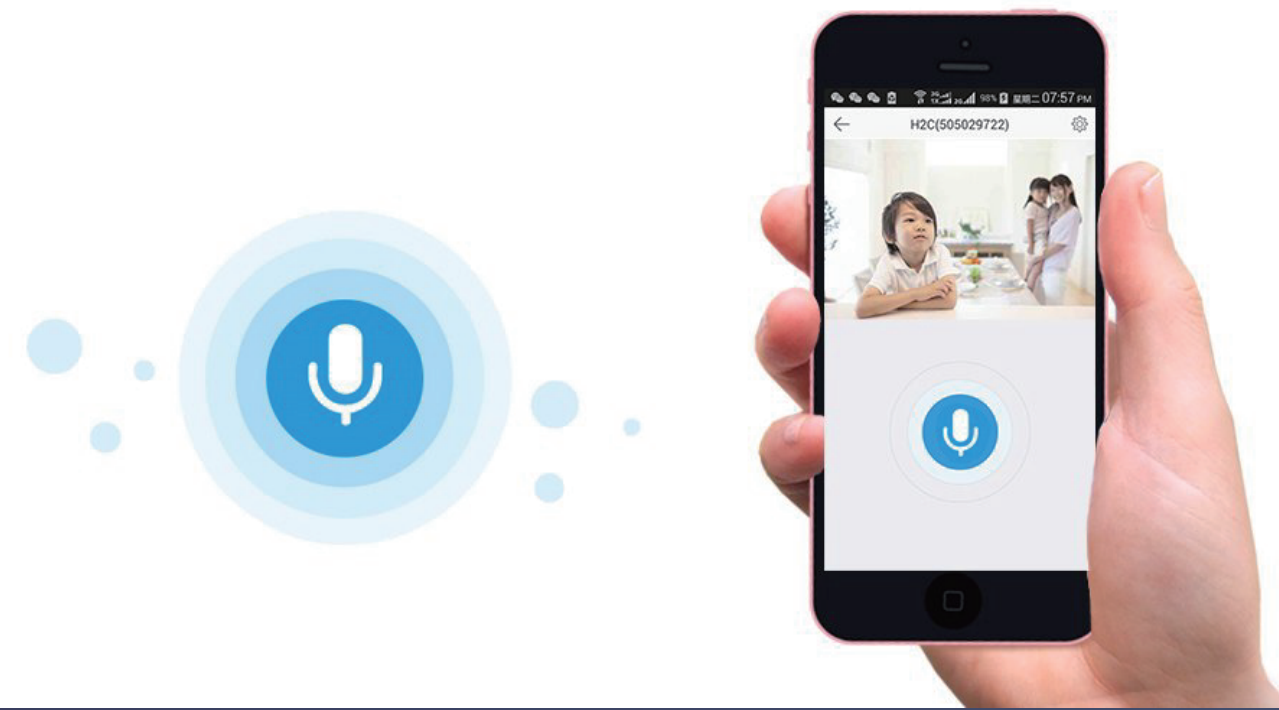


Instant alerts (manual activation required)

The C6P (ez360 Pano) watches for movement. It will take a picture and send alerts to your smartphone when it detects motions.

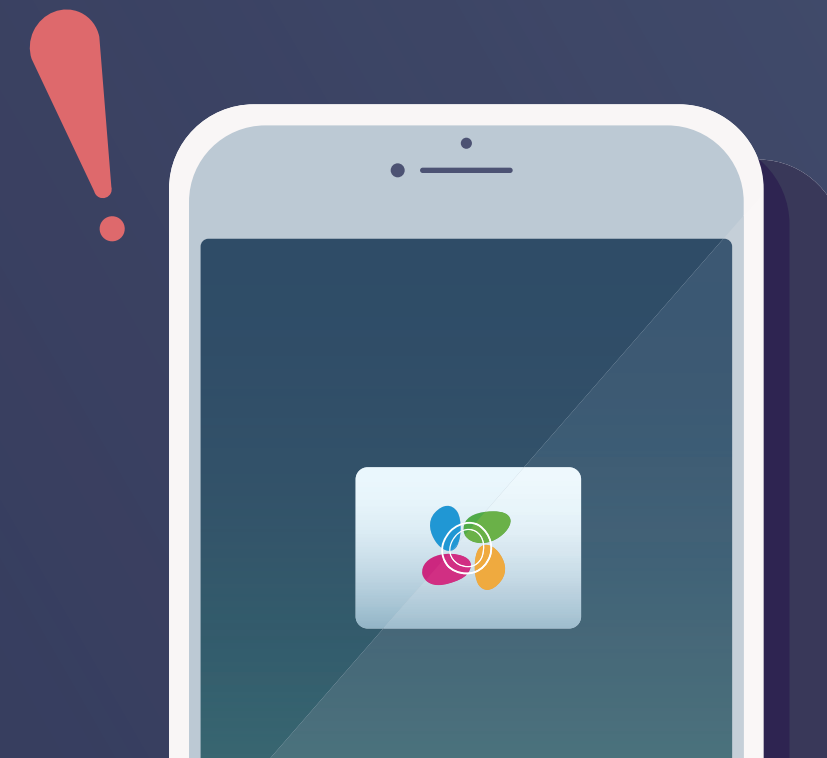

Durable metal body

Built with high-strength and anti-corrosion aluminum.

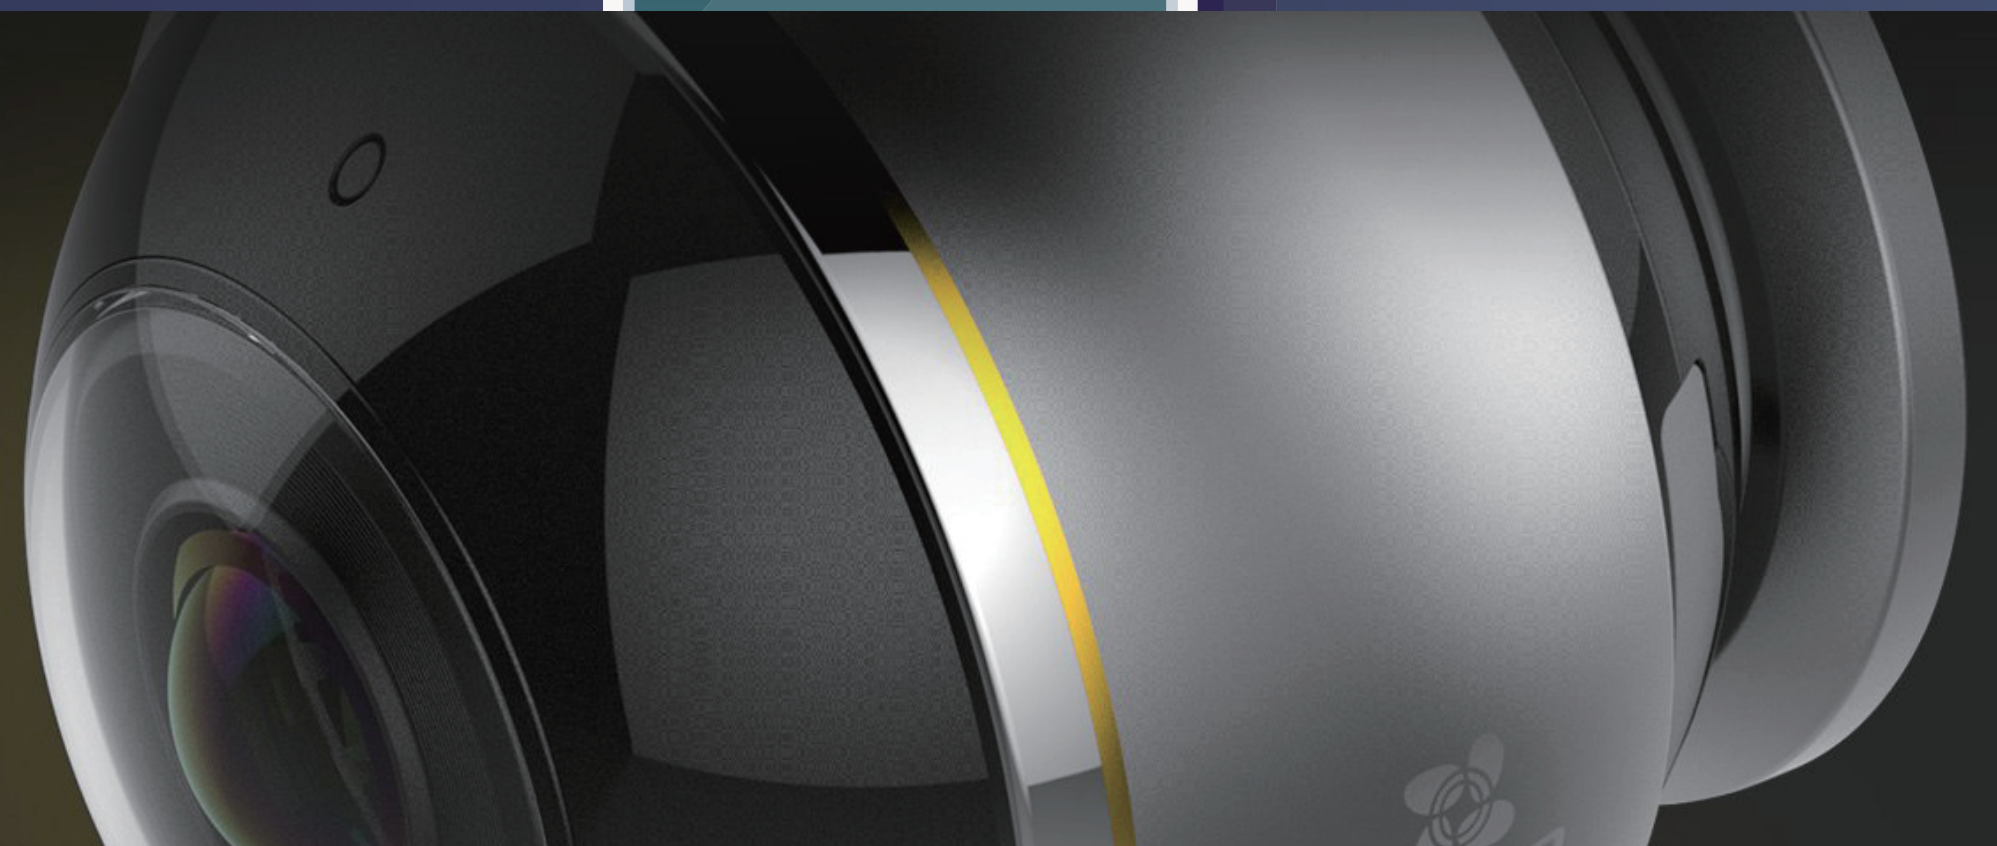

Specifications Model CS-CV346-A0-7A3WFR

Camera

Image Sensor	3 Megapixel 1/2.8" Progressive Scan CMOS
Minimum illumination	0.01 lux @(F2.2,AGC ON), 0 lux with IR
Shutter Speed	Self-adaptive shutter
Lens	1.2mm@ F2.2, Horizontal angle: 180° Diagonal angle: 180°
Lens Mount	M12
Day & Night	IR-cut filter
DNR	3D DNR
WDR	Progressive WDR

Compression

Video Compression	H.264
H.264 Type	Main Profile
Video Bit Rate	HD, Balanced and Smooth. Adaptive bit rate.

Image

Max. Resolution	1344×1344
Image Settings	Brightness, contrast, saturation, etc. (configurable via EZVIZ Studio)
BLC	Support

Network

Storage	Supports MicroSD card (max. 128GB)
Smart Alarm	Motion detection
Wi-Fi Pairing Protocol	SmartConfig (Wi-Fi One-Key Configuration) EZVIZ Cloud proprietary protocol
Interface Protocol	EZVIZ Cloud proprietary protocol
General Features	Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror Image, Password Protection, Watermark
Minimum Network Requirements	2Mbps

Wi-Fi

Standard	IEEE802.11 a/b/g/n/ac
Frequency Range	2.412GHz ~ 2.462GHz/5.15GHz ~ 5.35GHz/ 5.725GHz ~ 5.825GHz
Channel Bandwidth	Supports 20MHz
Security	WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 135Mbps

General

Power Supply	DC 5V±5%
Power Consumption	Max. 8W
IR Range	MAX. 7.5meters
Product Dimensions	70mm x 70mm x 70.6mm (0.23ft x 0.23ft x 0.23ft)
Packaging Dimensions	109.5mm x 109.5mm x 123mm
Weight	0.489 lb. (222g)

Package Contents:

- C6P (ez360 Pano) X 1
- Base X 1
- 3 Meters Power Cable X 1
- Screw Kit X 1
- Power Adapter X 1
- Base Cover X 1
- Drill Template X 1
- Quick Start Guide X 1

Requirements

- Operating Conditions: -10°C ~ 45°C, Humidity 95% or less (non-condensing)

Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH



Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd.
Other brands and product names are trademarks or registered trademarks of their respective holders.

<https://www.ezvizlife.com/>