



www.vigilanciainteligente.com

Tel: San Borja 924 616170 / 945 509622

La Molina 01 6409957 / 950 412169



Key Feature


- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- Up to 5000 faces, 5000 fingerprints and 25000 cards can be added
- Unlocks by fingerprints, cards and faces
- Supports anti-spoofing
- Supports configuration via Web remotely

Specification

System Parameters	
Operation Method	Display screen, physical buttons
Operation System	Embedded Linux operation system
RAM	1 GB
ROM	4 GB
Alarm parameters	
Tampering alarm	1
Network parameters	
Network protocol	TCP/IP, RTSP
Network interface	10/100/1000 Mbps self-adaptive Ethernet
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker

Audio compression standard	G.711 U, G.711 A
Audio compression rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Audio intercom	Two-way audio
General	
Power supply	12 VDC
Power consumption	≤ 13 W
Working temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Working humidity	10% to 90%
Weight	1.05 kg (without package) 2.166 kg (with package)
IP protection level	IP 65
Installation	Flush mounting
Material	Plastic & glass
Video parameters	
Video frame rate	50 Hz, 60 Hz
Night Vision	Low illumination, IR supplement lights
Video compression Standard	H.264

Wide dynamic range	True WDR
Camera	2 × 2 MP HD camera
Stream	Main stream: 1080p@30fps, 720p@30fps Sub stream: VGA@25fps, VGA@30fps
Display Parameters	
Display Screen	4.3-inch colorful LCD
Display Resolution	800 × 480
Access control Parameters	
Card type	Mifare card
Device interfaces	
I/O input	4
I/O output	0
RS-485	2
USB	0
Debugging port	1
Door control	1
Performances	
Fingerprints capacity	Max. 5000
Card capacity	Max. 25000
User capacity	Max. 10000
Face capacity	Max. 5000
Linked indoor station	Max. 500
Linked sub door station	Max. 8
Protocol	ISAPI, RTSP, SNMPv1,v2,v3
Unlock door	Unlock by presenting cards, unlock by face, unlock via Client Software, unlock by indoor station
Face anti-spoofing	Support
Face recognition distance	2 m
Face recognition time	≤ 0.2 s

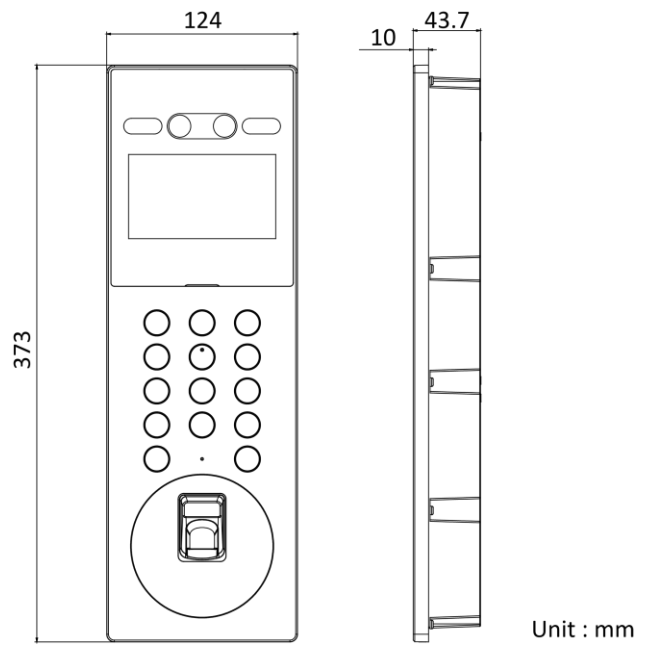

Available Model

DS-KD9203-FE6

Dimension

Distributed by

www.vigilanciainteligente.comTel: San Borja 924 616170 / 945 509622
La Molina 01 6409957 / 950 412169**HIKVISION®****Headquarters**No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com**Hikvision USA**T +1-909-895-0400
sales.usa@hikvision.com**Hikvision Australia**T +61-2-8599-4233
salesau@hikvision.com**Hikvision India**T +91-22-28469900
sales@pramahikvision.com**Hikvision Canada**T +1-866-200-6690
sales.canada@hikvision.com**Hikvision Thailand**T +662-275-9949
sales.thailand@hikvision.com**Hikvision Europe**T +31-23-5542770
sales.eu@hikvision.com**Hikvision Italy**T +39-0438-6902
info.it@hikvision.com**Hikvision Brazil**T +55 11 3318-0050
Latam.support@hikvision.com**Hikvision Turkey**T +90 (216)521 7070- 7074
sales.tr@hikvision.com**Hikvision Malaysia**T +601-7652-2413
sales.my@hikvision.com**Hikvision UK & Ireland**T +01628-902140
sales.uk@hikvision.com**Hikvision South Africa**Tel: +27 (10) 0351172
sale.africa@hikvision.com**Hikvision France**T +33(0)1-85-330-450
info.fr@hikvision.com**Hikvision Kazakhstan**T +7-727-9730667
nikia.panfilov@hikvision.ru**Hikvision Vietnam**T +84-974270888
sales.vt@hikvision.com**Hikvision UAE**T +971-4-4432090
salesme@hikvision.com**Hikvision Singapore**T +65-6684-4718
sg@hikvision.com**Hikvision Spain**T +34-91-737-16-55
info.es@hikvision.com**Hikvision Tashkent**T +99-87-1238-9438
uzb@hikvision.ru**Hikvision Hong Kong**T +852-2151-1761
info.hk@hikvision.com**Hikvision Russia**T +7-495-669-67-99
saleru@hikvision.com**Hikvision Korea**T +82-(0)31-731-8817
sales.korea@hikvision.com**Hikvision Poland**T +48-22-460-01-50
info.pl@hikvision.com**Hikvision Indonesia**T +62-21-2933759
Sales.Indonesia@hikvision.com**Hikvision Colombia**sales.colombia@hikvision.com